




## 16 CHANNELS ISOLATED DIGITAL INPUT MODULE

### TECHNICAL SPECIFICATIONS

Description	DIGITAL INPUT MODULE
Input range	+4V ~ +36V
Power input	9~24V (AC/DC)
Power consumption	<0.6W
Counter frequency	100Hz for 16 channels - 1000Hz for one channel
Ambient temperature operation	-20 ~ 85°C
Ambient temperature storage	-40 ~ 100°C
Ambient humidity	10% ~ 90%
Reference	AC1201-02

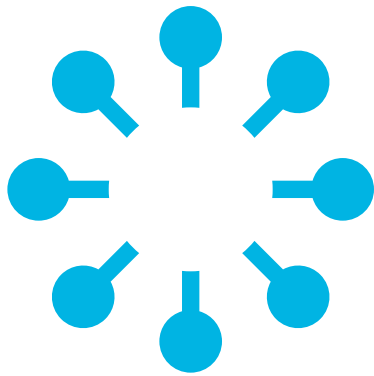

# WEBDYN

 flexitron group



**WEBDYN**  
 flexitron group



## INDIA

803-804, 8TH FLOOR,  
VISHWADEEP BUILDING, DISTRICT  
CENTRE, JANAKPURI  
NEW DELHI 110 058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM



## FRANCE

26 RUE DES GAUDINES  
78100  
SAINT GERMAIN EN LAYE



+33 139 042 940



CONTACT@WEBDYN.COM