




## SILICON SOLAR RADIATION SENSOR - TYPE SOZ 03

A silicon solar sensor can be used as an irradiance sensor, because the short-circuit current is proportional to the irradiance.

The sensors are built with monocrystalline or polycrystalline laminated under special solar glass with excellent UV resistance and long-term stability.

## TECHNICAL SPECIFICATIONS

Description	TYPE SOZ 03
Linear output signal	0 to 1500 W/m <sup>2</sup>
Accuracy	± 5%
Small drift	< 0.3/year
Integrated signal amplifier with output signal	4 to 20 mA Loop powered 2wire
Reference	SOZ 03

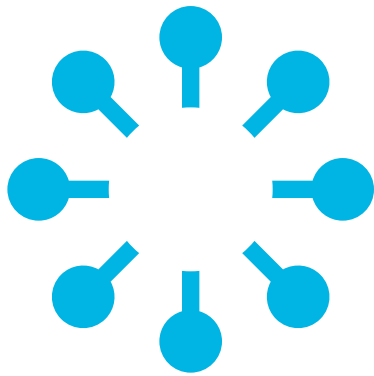

# WEBDYN

 flexitron group



**WEBDYN**  
 flexitron group



## INDIA

803-804, 8TH FLOOR,  
VISHWADEEP BUILDING, DISTRICT  
CENTRE, JANAKPURI  
NEW DELHI 110 058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM



## FRANCE

26 RUE DES GAUDINES  
78100  
SAINT GERMAIN EN LAYE



+33 139 042 940



CONTACT@WEBDYN.COM