




STAND ALONE RAIN COLLECTORS 6463 & 6465

The Rain Collector is designed to meet the guidelines of the World Meteorological Organization. Rain enters the collector cone, passes through a debris-filtering screen, and collects in one chamber of the tipping bucket. The shape is aerodynamically designed to minimize rainfall catch reduction caused by high winds.

TECHNICAL SPECIFICATIONS

Description	RAIN COLLECTORS 6463 & 6465
Accuracy	Rain rates up to 100/hr : $\pm 4\%$ of total
Cable length	12m
Connector	Modular RJ-11
Dimensions - rain collector	16.5cm x 24cm
Dimensions - collection area	214cm ²
Weight - 6463	1kg
Weight - 6465	1.5kg
Connections (red, green & yellow)	Switch terminal
Reference	6463 or 6465

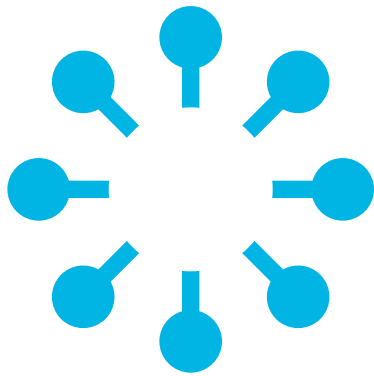

WEBDYN

 flexitron group



WEBDYN
 flexitron group



INDIA

803-804, 8TH FLOOR,
VISHWADEEP BUILDING, DISTRICT
CENTRE, JANAKPURI
NEW DELHI 110 058



+91 11 41519011



GURDEEP.JUNEJA@WEBDYN.COM



FRANCE

26 RUE DES GAUDINES
78100
SAINT GERMAIN EN LAYE



+33 139 042 940



CONTACT@WEBDYN.COM